


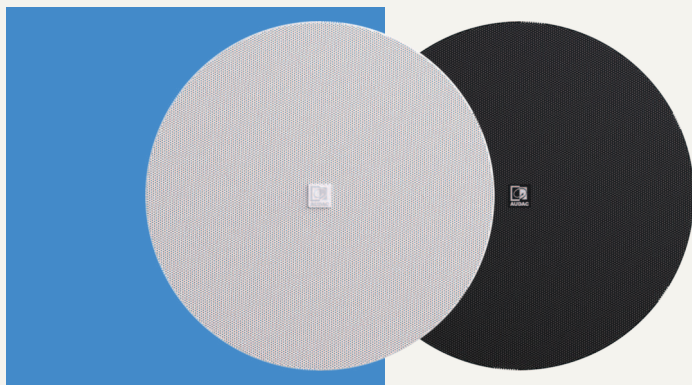

Available in black and white

Audac CIRA824

TECHNICAL DATA

Frequency response	40 Hz - 20 kHz (± 3 dB)
Frequency range	33 Hz - 20 kHz (-10 dB)
Power	160 W (peak); 80 W (program); 40 W (AES)
SPL	maximum 105 dB (@ 100 V; W / 1 m)
Sensitivity	89 dB (1 W / 1 m)
Impedance	8 Ω
Dispersion	140° (conical)
LF components	1x 8"
MF components	-
HF components	1x 1"
Transformer tapings	1: 24 W - 417 Ω ; 2: 12 W - 833 Ω ; 3: 6 W - 1667 Ω
Connectivity	Multi-tap Fast-con
Dimensions	270×82 mm ($\varnothing \times D$); 243 mm ($\varnothing$ cut-out measurement)
Type	2-way coaxial