


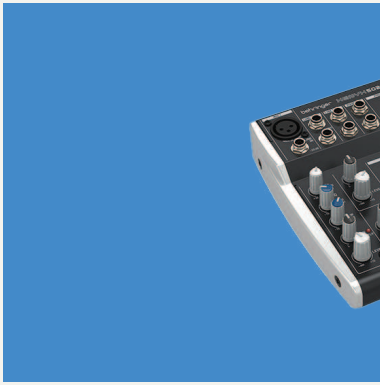

ultra-compact mixer with USB streaming interface

Behringer XENYX 502S

TECHNICAL DATA

Channels	5
Frequency response	10 Hz - 150 kHz (gain +10 dB; mono) 20 Hz - 70 kHz (gain +60 dB; mono) 20 Hz - 200 kHz (stereo)
THD+N	0.005% (1 kHz at +10 dB gain)
Impedance	2 k Ω (input); 22 k Ω (mono line in bal); 10 k Ω (mono line in unbal)
Gain	from +10 to 60 dB
Noise	-109 dBu (A-weighted)
Features	Stereo USB audio interface; direct mixing; versatile sub mixer
Connectivity	1x XLR TRS (3-pin; mic in); 1x 1/4" TRS (line in) 4x 1/4" TRS (stereo line in); 1x RCA (stereo line in) 2x 1/4" TRS (main out); 1x 1/4" TRS (out); 1x RCA (stereo line out); 1x USB-B
Dimensions	134×47×177 mm (W×H×D)
Net weight	1.2 kg net