


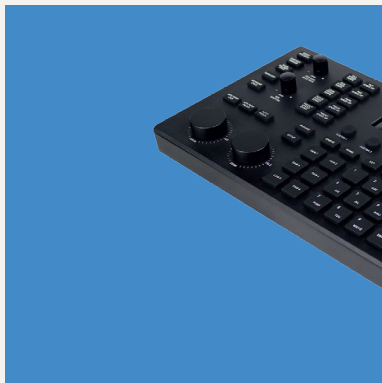

PTZOptics PT-SUPERJOY-G1

TECHNICAL DATA

Protocols	PTZOptics VISCA; VISCA over IP; PELCO-D; WebSockets PELCO-P via Serial Ports; Limited Sony VISCA VISCA over IP support; Limited ONVIF support Limited NDI support; Limited Panasonic Support (HTTP)
Baud rate	120 - 19200 bps
Channels	Group 1: 7 channels; Group 2: 7 channels; Group 3: 7 channels Group 4: 7 channels; Group 5: 225 channels; 253 ch / camera
Working range	1200 m (RS485); 100 m (RJ45); 15 m (RS232 / RS422)
Connectivity	1x HDMI 1.3 (out); 1x USB-A 2.0 (service); 1x RJ45 1x 5-pin Phoenix (RS422 / RS485); 1x RS232
Power	DC 12 V; PoE (802.3af); 6 W max power consumption
Interface	RS232 Full Duplex; RS485 Semi Duplex; RS422 Full Duplex
Dimensions	354×101×180 mm (W×H×D)
Net weight	1.7 kg