


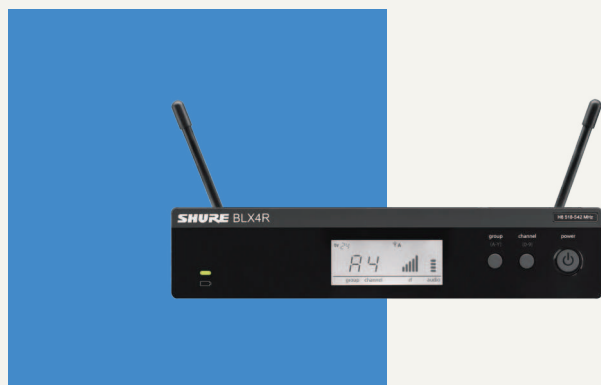

rack mount analog wireless receiver

Shure BLX4R

TECHNICAL DATA

Audio output	–20.5 dBV (XLR; into 100 k Ω load); –13 dBV (6.3 mm jack; into 100 k Ω load)
Range	Up to 91 m
Step	–
Image rejection	> 50 dB
Sensitivity	–105 dBm for 12 dB SINAD; typical
Frequency response	50 Hz – 15 kHz
THD	< 0.5 % (ref. $\pm$ 33 kHz deviation with 1 kHz tone)
Gain	–
Impedance	200 Ω (XLR out); 50 Ω (6.3 mm jack out)
Dynamic range	100 dB (A-weighted, typical)
Connectivity	1x XLR (mic out); 1x 6.3 mm jack (out); 2x BNC (Antenna)
Dimensions	198×42×163 mm (W×H×D)
Net weight	998 g net