

Shure

SLXD24D+E/58-G65



Set contains:

- 1x SLXD4D+ digital wireless receiver
- 2x SLXD2+/58 handheld transmitter
- 2x SM58 dynamic microphone
- 2x microphone clips
- 2x ¼ wave antennas
- 1x rackmount kit
- 1x power supply




dual-channel digital wireless receiver

Shure SLXD4D+

TECHNICAL DATA

Frequency band	470 - 606 MHz (G65)
Dynamic range	>118 dB
Tuning	Up to 11 systems in 6 MHz / 14 systems in 8 MHz
Image rejection	>75 dB
Sensitivity	-105 dBm for 12 dB SINAD; typical
Power	15 VDC @ 360 mA
Full scale output	+18 dBV (6.35 mm jack / XLR line); -12 dBV (XLR mic)
Gain	-18 to +42 dB in 1 dB steps
Impedance	1.1 k Ω (6.3 mm jack); 500 Ω (XLR line); 500 Ω (XLR mi);
Switch	30 dB pad
Connectivity	2x XLR (mic/line out); 2x 6.3 mm jack (aux); 2x BNC (Antenna); 1x RJ45
Dimensions	197×42×152 mm (W×H×D)
Net weight	930 g net

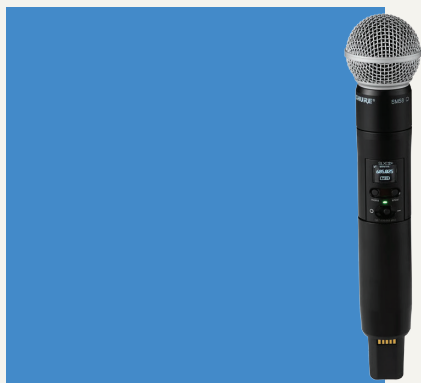

wireless handheld transmitter with SM58 microphone

Shure SLXD2+/58

TECHNICAL DATA

Frequency response	50 Hz - 15 kHz
Type	Dynamic
Polar pattern	Cardioid
Sensitivity	-54.5 dBV / Pa (1.85 mV)
SPL	maximum 150 dB
Configuration	Unbalanced
Impedance	150 Ω (output)
Input level	8.2 dBV
Occupied bandwidth	<200 kHz
Power	1 mW / 10 mW
Connectivity	3-pin XLR
Dimensions	51×176 mm (\varnothing ×D)
Net weight	298 g net